




TH43
 2-STROKE FORCED AIR COOLED
 ELECTRONIC IGNITION
 43.2cm³, 2.0kW (2.7Hp) / 7500rpm

GENERAL SPECIFICATIONS

| | |
|------------------------------------|---|
| Engine Type | Forced air cooled 2-stroke, horizontal shaft, gasoline engine |
| Number of Cylinder | 1 |
| Bore x Stroke | 41.5 x 32mm (1.63 x 1.26in.) |
| Piston Displacement | 43.2cm ³ (2.6cu.in.) |
| Max.Horse Power | 2.0kW (2.7Hp) / 7500rpm |
| Direction of Rotation | Counter-clockwise facing the PTO shaft |
| Fuel | Mixed fuel of gasoline and 2-stroke oil (Ratio 50 : 1) |
| Fuel Tank Capacity | 1.0litre (1.1US.qt.) |
| Min. Fuel Consumption Ratio | 598gr / kW-hr (440gr / Hp-hr) / 6000rpm |
| Carburetor | T.K DPR11K |
| Ignition | Solid state ignition (None breaker) |
| Plug | NGK BMR6A |
| Starter | Recoil starter |
| Lubrication | Fuel mixture |
| Air Filter | Dry type (Polyurethane form element) |
| Clutch | Automatic centrifugal type |
| Net Weight | 3.6kg (7.9lbs) without throttle cable and lever |
| Dimension (L x W x H) | 182 x 243 x 260mm (7.17 x 9.57 x 10.24in.) |

Specifications subject to change without notice.

PERFORMANCE CURVES

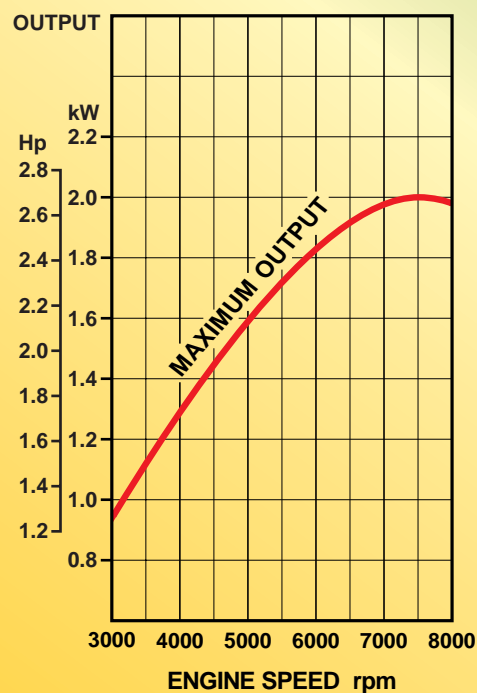

Kawasaki
 Let the good times roll.

TH43 : DIMENSIONAL SPECIFICATIONS

Unit : mm (in.)

