




TH48
 2-STROKE FORCED AIR COOLED
 ELECTRONIC IGNITION
 48.6cm³, 2.2kW (3.0Hp) / 7500rpm

GENERAL SPECIFICATIONS

Engine Type	Forced air cooled 2-stroke, horizontal shaft, gasoline engine
Number of Cylinder	1
Bore x Stroke	44 x 32mm (1.73 x 1.26in.)
Piston Displacement	48.6cm ³ (3.0cu.in.)
Max.Horse Power	2.2kW (3.0Hp) / 7500rpm
Direction of Rotation	Counter-clockwise facing the PTO shaft
Fuel	Mixed fuel of gasoline and 2-stroke oil (Ratio 50 : 1)
Fuel Tank Capacity	1.0litre (1.1US.qt.)
Min. Fuel Consumption Ratio	544gr / kW-hr (400gr / Hp-hr) / 6000rpm
Carburetor	T.K DPR11K
Ignition	Solid state ignition (None breaker)
Plug	NGK BMR6A
Starter	Recoil starter
Lubrication	Fuel mixture
Air Filter	Dry type (Polyurethane form element)
Clutch	Automatic centrifugal type
Net Weight	3.6kg (7.9lbs) without throttle cable and lever
Dimension (L x W x H)	182 x 243 x 260mm (7.17 x 9.57 x 10.24in.)

Specifications subject to change without notice.

PERFORMANCE CURVES

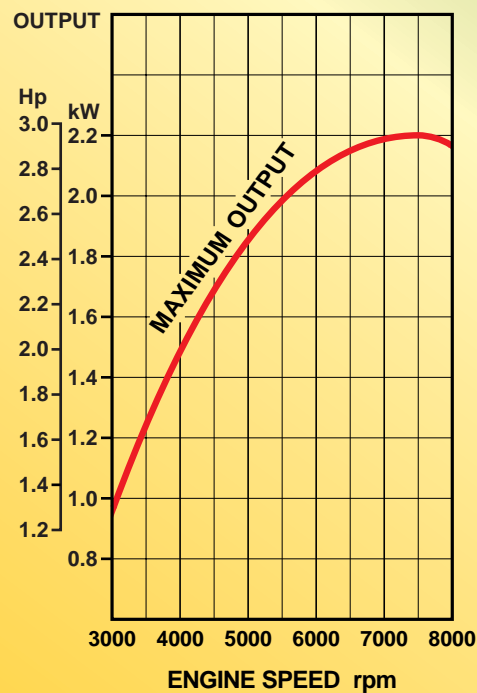

Kawasaki
 Let the good times roll.

TH48 : DIMENSIONAL SPECIFICATIONS

Unit : mm (in.)

